



# TECHNISCHE FICHE

## GEPROFILEERDE HANGGOOT GPR ZONDER SLAB

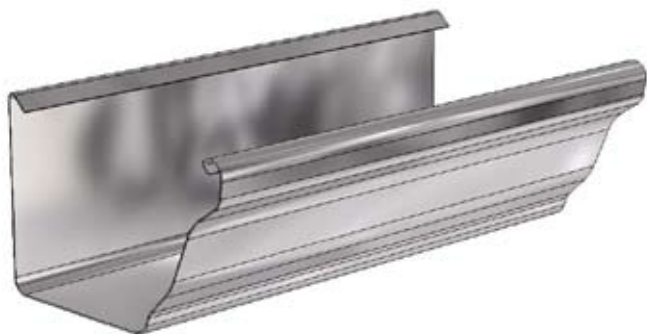

art nr	materiaal	dikte	lengte	gewicht
GPR-K7	koper (NEN-EN1172)	0.7 mm	5 m	10.4 kg
GPR-K8	koper (NEN-EN1172)	0.8 mm	5 m	11.9 kg
GPR-Z7	zink (NEN-EN 988)	0.7 mm	5 m	8.4 kg
GPR-Z8	zink (NEN-EN 988)	0.8 mm	5 m	9.6 kg
GPR-Z1	zink (NEN-EN 988)	1.0 mm	5 m	12.0 kg
GPR-A8	zink patina donkergrijs (NEN-EN 988)	0.8 mm	5 m	9.6 kg
GPR-Q8	zink patina lichtgrijs (NEN-EN 988)	0.8 mm	5 m	9.6 kg

De bevestiging van de hanggoten gebeurt met goothaken.

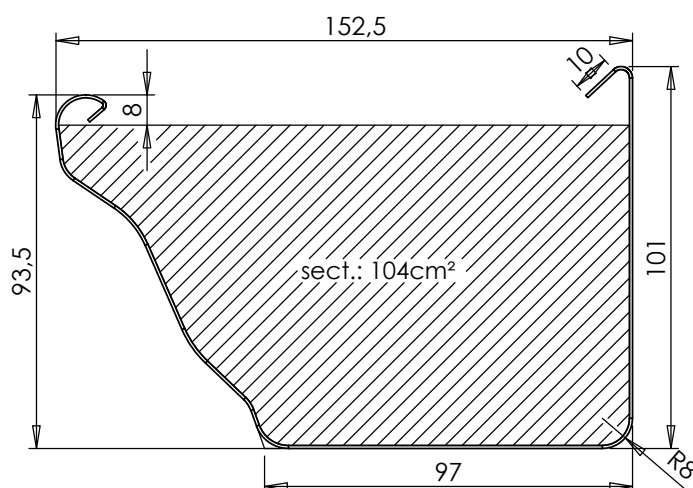

Synoniem van KWALITEIT en SERVICE

APOK KAMPENHOUT  
administratieve hoofdzetel  
Oudestraat 11, B-1910 Kampenhout  
Tel.: +32 (0)16 61 72 62 - Fax: +32(0)16 61 72 81  
Website: www.apok.be - E-mail: info@apok.be

